

GRAPHENE XT XENON 135 SLIMBODY



GRAPHENEXT

For optimum performance use: HEAD Reflex

Total String Length: 8 m / 26,3 ft

String Pattern: 14 Main (4,5 m / 14,8 ft)
17 Cross (3,5 m / 11,5 ft)


Rec. String Tension: 11/10 +/- 2 kg / 24-22 lbs +/- 3

Main Strings

Start at the bottom Centre holes L + R1. For the right side of the Main strings clamp 2,3m (7,5ft) of string at hole R1. Tighten 2 main string right, two main strings left and so on skipping out holes L + R7 as well as L + R25. Tie off at holes L + R26.

Cross Strings

Tie on the cross string at L27 and lace the string through hole L25. Tighten all cross strings in the direction of the throat skipping out holes L + R24 as well as L + R8. Tie off at hole L6.

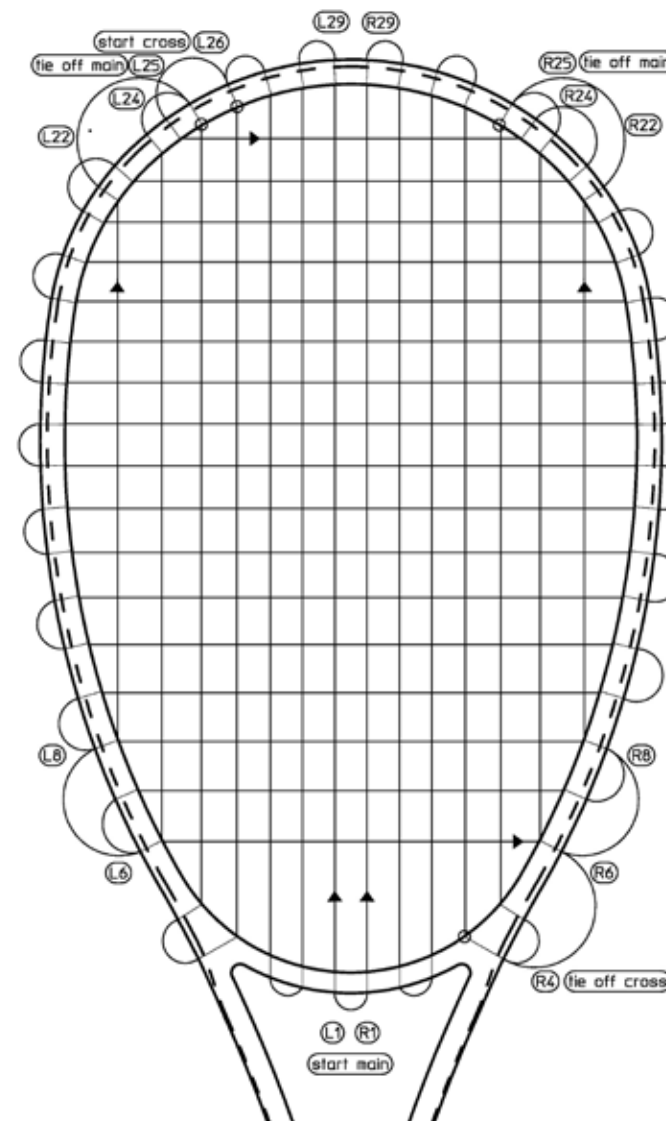

GRAPHENE XT XENON 135 SLIMBODY - FAN



GRAPHENEXT

For optimum performance use: HEAD Reflex

Total String Length: 10 m / 33 ft

String Pattern: 18 Main (6 m / 19,7 ft)
17 Cross (4 m / 13,3 ft)

Rec. String Tension: 11/10 +/- 2 kg / 24-26 lbs +/- 3

1. The Main Strings

Start at the TOP centre holes L + R29. For the right side of the Main strings clamp 3,0m (9,8ft) of string at hole R29. Tighten 2 main string right, two main strings left and so on skipping out holes L + R24, L + R22, L + R20 as well as L + R18 and L + R17. The main strings share holes L + R1, 2, 3 and 4. Tie off at holes L + R5.

2. The Cross Strings

Tie on the cross string at L26 and lace the string through hole L24. Tighten all cross strings in the direction of the throat skipping out holes L + R23 and L + R21. Shared holes with main strings are L + R19 and L + R16. Tie off at hole L8.

